

# JISKOOT Extreme Temperature Cells 210P, 210P-HP and 210EH, 210EH-HP

TECHNOLOGY



# JISKOOT Extreme Temperature Cells 210P, 210P-HP and 210EH, 210EH-HP


Cameron's JISKOOT™ 210 Extreme Temperature Cell is a reliable and accurate flow-through sample extraction device, suitable for use as part of an externally pumped, bypass fast-loop sampling system.

Available in standard and high-pressure versions, it is the ideal solution for a wide range of liquid sampling applications with an extended temperature range of -71° F to 482° F (-57° C to 250° C).



The 210 Cell has a unique three-stage positive displacement action giving accurate sampling irrespective of variations in process pressure or fluid viscosity. Designed for use with 1" to 2" diameter lines, the entire stream passes through the body of the device. The flow-through 210 Cell sampler has a bottom exit sample outlet, which avoids any possible water separation, and reduces any dead volume to an insignificant amount within the sampler.

Maintenance and replacement of seals can be performed without removing the sampler from the fast-loop. Established as one of the key instruments in the sampling process for fiscal transfer and quality assessment, the 210 has a vast worldwide installed base and is seen as one of the most reliable platforms on which to build a sampling system.

## Three-Stage Positive Displacement Action

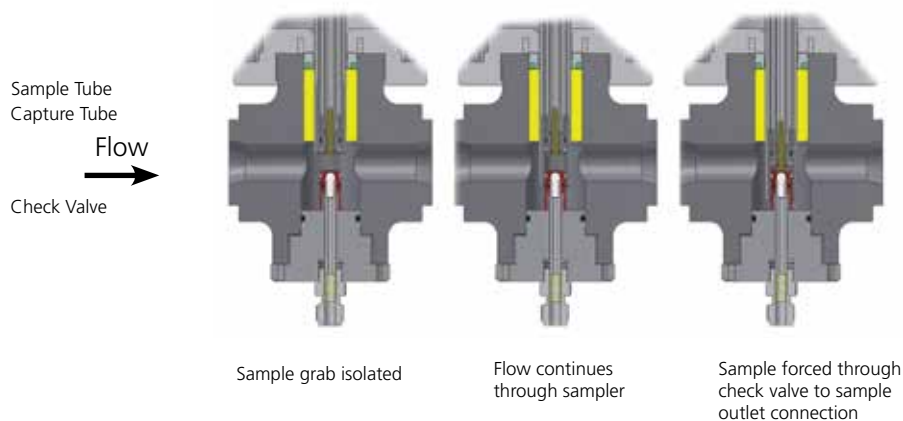

## Material de-rating (SS. 316)

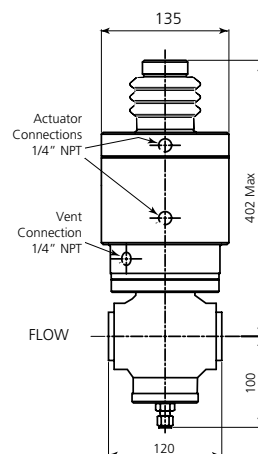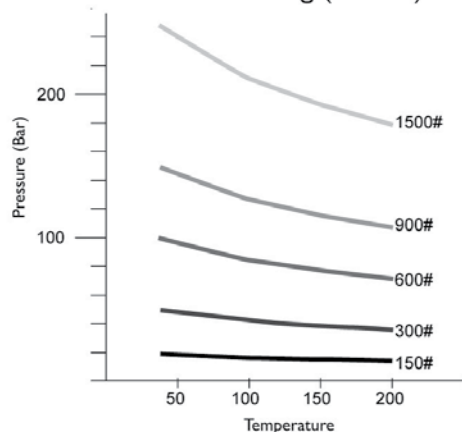

## Specifications

Fluids sampled	Crude oil, refined hydrocarbons (including non-lubricating products) and non corrosive chemicals							
Viscosity range	0.5 to 8000 cSt							
Process temperature range	Flange dependant - see chart below							
Ambient temperature range	-4° F to 149° F (-20° C to 65° C)							
Maximum operating pressure	Class	149° F (38° C)	149° F (50° C)	149° F (100° C)	149° F (150° C)	149° F (200° C)	149° F (250° C)	Model
(standard materials of construction) see chart above for material de-rating	150#	19.0	18.4	16.2	14.8	13.7	12.1	210P, 210EH
	300#	49.6	48.1	42.2	38.5	35.7	33.4	210P, 210EH
	600#	99.3	96.2	84.4	77.0	71.3	66.8	210P or 210P-HP, 210EH or 210EH-HP
	900#	148.9	144.3	126.6	115.5	107.0	100.1	210HP, 210EH-HP
	1500#	248.2	240.6	211.0	192.5	178.3	166.9	210P-HP, 210EH-HP
Operating Temperature	-57° C to 250° C (71° F to 482° F)		Process wetted parts		Design Temp: 71° C to 482° C (-57° C to 250° C)			
Configuration	Full bore - flow-through cell							
Size range	1" to 2" Nominal bore							
Mounting arrangements	1" nominal bore – ANSI class 150, 300 or 600 – wafer type (standard) (1", 1½" and 2" flanged versions available on request)							
Sample grab size (nominal)	1.04cc or 2.04cc							
Grab size repeatability	Better than ± 2%							
Grab size adjustment	1cc version ± 20% - 2cc version ± 10%							
Maximum grab rate <sup>3</sup> (per min)	210P: 100		210P-HP: 60		210EH: 50		210EH-HP: 15 (½" NB hose)	
Sample outlet connection	1/4" Swagelok®							
Capture time	Less than 250 ms							
Standard materials	Pressure retaining: Standard seals: Standard O-rings (NACE certification available) <sup>1</sup>				316/304 Stainless steel Graphite filled P.T.F.E. Viton® (Kalrez available) <sup>1</sup>			
Operating standards and CE compliance	ISO 3171, API 8.2, IP 6.2, PED - 97/23/EC				Machinery directive - 2006/42/EC, ATEX 94/9/EEC			
Approximate weight	210P: 27lb (12.5kg)		210P-HP: 29lb (13.5kg)		210EH: 27lb (12.5kg)		210EH-HP: 29lb (13.5kg)	

## Actuation data

Actuation method	210P and 210P-HP: Pneumatic	210EH and 210EH-HP: Hydraulic
Air Supply range <sup>2</sup>	210P and 210P-HP: 60-145 psi (4-10 bar) (lubricated)	210EH and 210EH-HP: N/A
Air Consumption <sup>2</sup> (30 grabs/min)	210P: 0.47 ft3/min[ACFM] - (0.8m3/hr) at 5 bar 210P-HP: 1 ft3/min[ACFM] - (1.67m3/hr) at 5 bar	
Actuator connections	2 x 1/4"NPT female	

<sup>1</sup>Charges made for these items

<sup>2</sup>ACFM reflects the actual swept volume for 30 sample cycles without allowance for interconnection piping

<sup>3</sup>Maximum grab rate, consumption, seal life and supply requirements are dependant on process conditions, i.e., line pressure and fluid viscosity

**NORTH AND SOUTH AMERICA**

14450 JFK Blvd.  
Houston, TX 77032  
USA  
Tel 1 281 582 9500  
ms-us@c-a-m.com

**EUROPE, AFRICA, CASPIAN AND RUSSIA**

JISKOOT Technology Centre  
Longfield Road  
Tunbridge Wells  
Kent, TN2 3EY  
United Kingdom  
Tel 44 1892 518000  
ms-jiskootuksales@c-a-m.com

**ASIA PACIFIC**

Suite 16.02 Menara AmFirst  
No. 1 Jalan 19/3  
46300 Petaling Jaya  
Selangor Darul Ehsan  
Malaysia  
Tel 603 7954 0145  
ms-kl@c-a-m.com

**MIDDLE EAST**

Level 9, Al Jazira Club Tower A  
PO Box 47280, Muroor Road  
Abu Dhabi  
United Arab Emirates  
Tel 971 2 596 8400  
ms-uk@c-a-m.com

Learn more about measurement at:  
[www.c-a-m.com/measurement](http://www.c-a-m.com/measurement)



**ALGERIA • CANADA • CHINA • INDIA • MALAYSIA • RUSSIA • UAE • UK • USA**

**HSE Policy Statement**

At Cameron, we are committed ethically, financially and personally to a working environment where no one gets hurt and nothing gets harmed.